



# OBSH/OBSV/OFS RELAMPING INSTRUCTIONS

**\*\* Installation of these products should only be performed by a qualified electrician. \*\***


1. Remove screws from the door frame.




2. Push the fixture housing up until it locks into the open position.

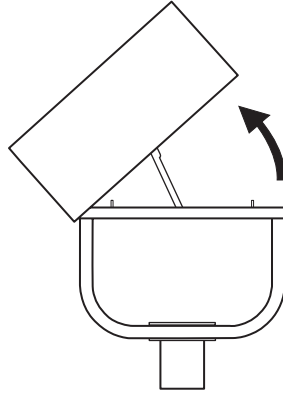

3. Relamp the fixture.

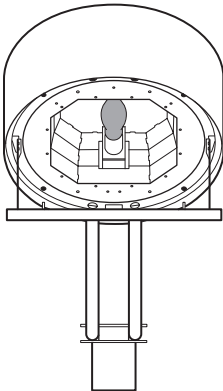

4. Compress the spring latches to release latch and close the housing.

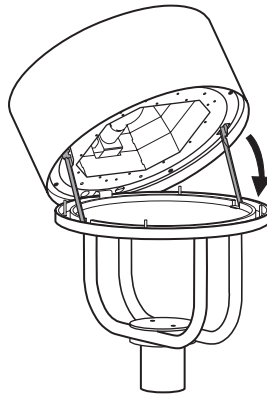

5. Replace and tighten screws to secure the fixture housing to the door frame.

**Note:** Refer to individual product specification sheets for fixture details.

