



TANDEM IN-LINE WIRING

Use Tandem In-Line Wiring option for 2 different applications:

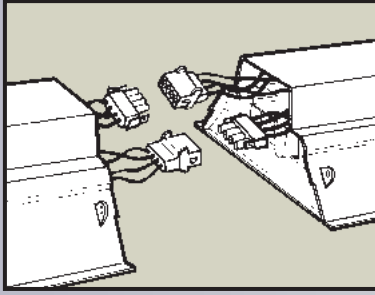


1. CONTINUOUS ROW FIXTURES

- Fully pre-wired wiring for continuous row strips, industrials, and other Williams products
- Polarized, quick-connect harnesses provide fast, error-proof wiring
- Lamps down the row will be wired in tandem

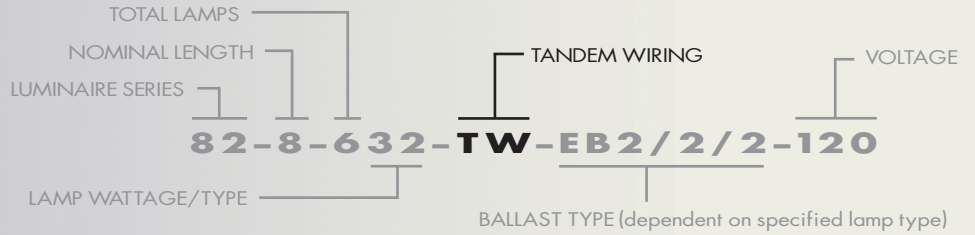



2. SINGLE FIXTURES

- Lamps wired/mounted in tandem
- No harness required

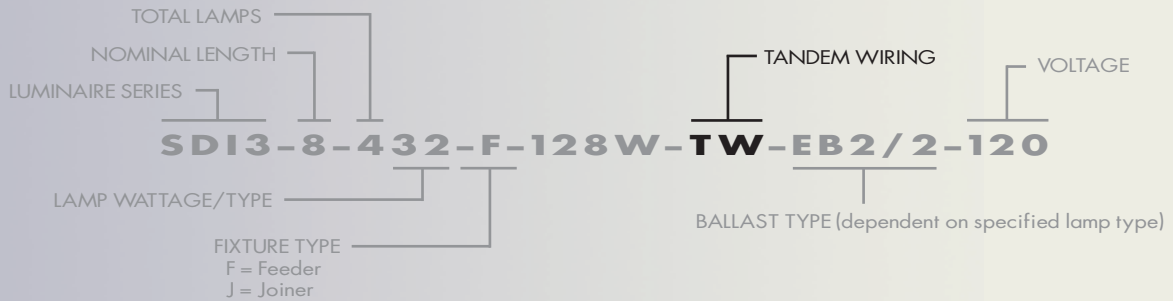

MASTER/SATELLITE SYSTEM

1. Select the desired Williams recessed fixture
2. Add the "MS_" option, as shown below

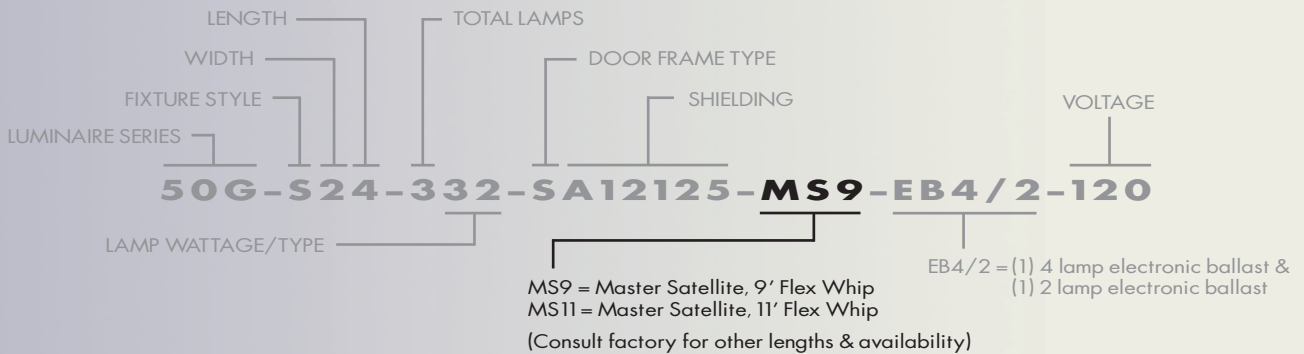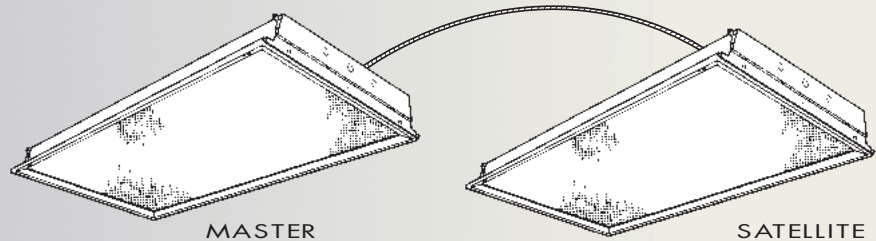

- The above line item accounts for 1 pair of fixtures
- Default wiring will be inboard/outboard where applicable
- When multiple ballasts are specified, standard wiring is inboard/outboard