

COMPACT FLUORESCENT INDICATOR LIGHT

PL-COPY



SUBMITTAL:

JOB:

TYPE:

VOLTAGE:


EXAMPLE

PL-COPY - SF - (2) 13WPL - OPTIONS - EB2 - 120

SERIES MESSAGE COPY NUMBER OF SIDES NUMBER OF LAMPS WATTAGE/TYPE OPTIONS BALLAST TYPE VOLTAGE

FEATURES

- ▶ Available with choice of message—consult factory for custom orders.
- ▶ Red on white lettering standard—consult factory for custom colors.
- ▶ Available single-faced or double-faced.
- ▶ Universal mount canopy included for easy installation on wall or ceiling.
- ▶ This fixture is proudly made in the USA.

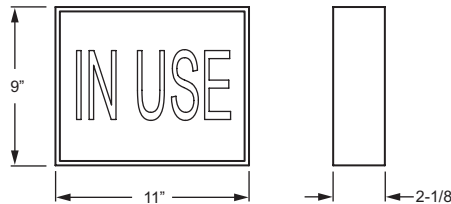

SPECIFICATIONS

Housing – Extruded aluminum.
Housing Finish – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal.
Electrical – Electronic ballast standard with compact fluorescent lamps. Prewired at factory for easy field installation. Must specify voltage (120V or 277V).
Mounting – Surface mount on wall or ceiling with universal canopy.
Labels – UL/CUL listed for dry or damp locations.

ORDERING INFORMATION

SERIES

PL Compact Fluorescent Indicator Light

MESSAGE COPY

Consult factory for custom message.

ARA Area of Rescue Assistance
BO Beam On
CLOS Closed
DIU Darkroom in Use
DR Darkroom
OCC Occupied
OTA On the Air
OPE Open
RIU Room in Use
XIU X-Ray in Use

NUMBER OF SIDES

SF Single face
DF Double face

LAMP OPTIONS

# OF LAMPS	WATTAGE/TYPE
(2)	13WPL

OPTIONS

Consult factory for custom color.

BALLAST TYPE

EB2 2-lamp electronic ballast

VOLTAGE (Must specify)

120 120V
277 277V

