
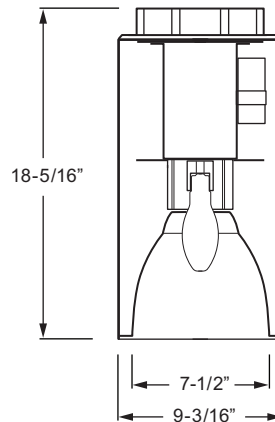


9" OPEN RATED OCTAGONAL SURFACE MOUNT CYLINDER REQUIRES MP SERIES LAMP

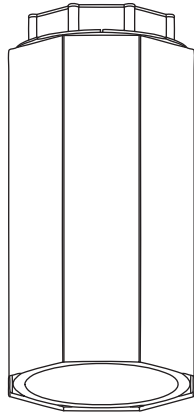

CATALOG NUMBER

SERIES	WATTAGE	LAMP BASE	VOLTAGE
OMHOC90	50	ED17-MP-MED	
OMHOC90	70	ED17-MP-MED	
OMHOC90	100	ED17-MP-MED	
OMHOC90	150*	ED17-MP-MED	

* HPS only.

- Standard self-flanged aluminum reflector with semi-specular low-iridescent (CS) finish.
- Standard cylinder colors are bronze, black, or white (must specify when ordering).
- Heavy-gauge die-formed and welded aluminum housing.
- Porcelain socket.
- Pendant mount (indoor applications only) and wall mount available as options.
- Encapsulated core and coil ballast: dual tap (120/277).
- Core and coil ballast for 50W.
- Prewired at factory for easy field installation.
- Lamp by others.
- Custom colors available.
- UL/CUL listed for dry or damp locations. UL/CUL listed as wet location under covered ceiling when used in conjunction with C73/___ or CGS/___ option.
- This fixture is proudly made in the USA.

OPTIONS & ADDERS

SUFFIX

White housing	WHT
Black housing	BLK
Bronze housing	BRZ
Clear semi-specular reflector	CS
Clear specular reflector	SPC
Straw reflector	STR
Champagne gold reflector	CG
Gold reflector	GD
Wheat reflector	WT
Pewter reflector	PW
Satin-glow reflector	SG
Micro-baffle	MB
C73 clear prismatic glass lens w/accent cone	C73/AC
C73 clear prismatic glass lens w/micro-baffle	C73/MB
Fresnel glass lens w/accent cone	FF/AC
Fresnel glass lens w/micro-baffle	FF/MB
Clear glass lens w/accent cone	CGS/AC
Clear glass lens w/micro-baffle	CGS/MB
Fuse	F
High pressure sodium 208, 240, 347, 480 volt	Prefix HPS- (#) VOLT
Wall mount	WM
Pendant mount (Swivel canopy w/24" stem, indoor applications only)	PM
Quartz restrike (Enclosed fixtures only)	QRS
Electronic ballast (Consult factory)	EB

FIXTURE SUBMITTED / APPROVED



DOWNLIGHTING

