

# DECORATIVE NON-TAPERED ALUMINUM POLE AND BASE

# AV10



**SUBMITTAL:**

**JOB:**

**TYPE:**


EXAMPLE:

**VM - AV10 - A - 080 - 40 - 188 - S - T238 - DBR - AB - OPTIONS**

PREFIX      SERIES      MATERIAL      HEIGHT      TOP DIAMETER      WALL THICKNESS      SHAFT STYLE      FIXTURE MOUNTING      FINISH OPTIONS      ANCHOR BOLTS      OPTIONS/ ACCESSORIES

## SERIES

**AV10** — Series AV10 poles are 8' to 16' in height including a cast aluminum structural base and a 4" O.D. straight round aluminum shaft. The pole is designed to accommodate up to two fixtures on a pole top assembly with a maximum 36" O.C. fixture span.

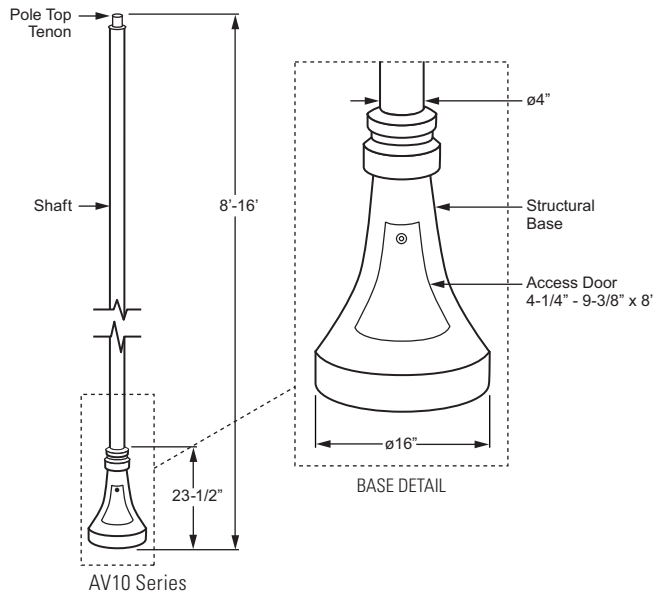

## AV10 SERIES

**SHAFT** — The pole shaft is extruded from seamless 6063 alloy aluminum.

**POLE TOP** — A pole top plate and tenon (must specify size) are provided for top mount luminaire or Williams' pole top assembly. A removable finial is available for poles receiving drilling patterns for side-mount luminaire arm assemblies.

### ACCESS DOOR

The structural base includes an access door for easy on-site maintenance.

### STRUCTURAL BASE

The structural base is cast from 356 alloy aluminum. A grounding provision with hardware is provided. The pole is inserted and welded into the structural base casting. The completed assembly is heat-treated to a T6 temper.

## MATERIAL (Must specify)

**A** Aluminum

## HEIGHT (Must specify)

<b>080</b>	8'-0"	<b>100</b>	10'-0"	<b>120</b>	12'-0"
<b>140</b>	14'-0"	<b>160</b>	16'-0"	<b>SL</b> ___	Special Pole Length (Please specify, consult factory)

## TOP DIAMETER (Must specify)

**40** 4"

## WALL THICKNESS (Must specify)

**188** 0.188"      **250** 0.250" (14' and 16' shaft heights only)

## SHAFT STYLE (Must specify)

**S** Straight Round

### FIXTURE MOUNTING

Designed for pole top tenon or drilled side mount. See Williams' Pole Top Assemblies for various fixture mounting tenon and arm assemblies.


#### RADIAL INDEX

The Radial Index references how parts are oriented around the shaft. A degree measurement is used from a base point. The standard base point of reference is the access door. Degrees are measured in a clockwise motion as viewed from the top of the shaft.

### FIXTURE MOUNTING (Must specify)

#### POLE TOP MOUNT


<b>T238</b>	2-3/8" O.D. x 4" Round Tenon
<b>T278</b>	2-7/8" O.D. x 4" Round Tenon
<b>T33</b>	3" O.D. x 3" Round Tenon (Use with Williams' Historic Pole Top Assemblies)
<b>T312</b>	3-1/2" O.D. x 12" Round Tenon (Use with Williams' AVPT Decorative Pole Top Assemblies)
<b>TC_____</b>	Custom Round Tenon (Must specify tenon diameter (O.D.) and height, consult factory)



#### DRILLED SIDE MOUNT

Must specify drilling location using codes below. See radial index for clarification.

**EXAMPLE: sm/s**  
(Side mount drill, single fixture located at 0°)

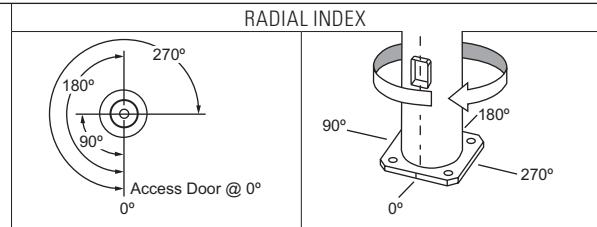

**SM/S**  
Side Mount Drill/Single 0°  
(Located at 0°)



**SM/D90**  
Side Mount Drill/Double 90°  
(Located at 0° and 90°)



**SM/D180**  
Side Mount Drill/Double 180°  
(Located at 0° and 180°)



**SM/T90**  
Side Mount Drill/Triple 90°  
(Located at 0°, 90°, and 180°)



**SM/T120**  
Side Mount Drill/Triple 120°  
(Located at 0°, 120°, and 240°)



**SM/Q90**  
Side Mount Drill/Quad 90°  
(Located at 0°, 90°, 180°, and 270°)

### FINISH OPTIONS

Polyester powder coat applied over chromate pre-treatment.

### FINISH OPTIONS (Must specify)


<b>BLK</b>	Black (RAL# 9004)	<b>DBR</b>	Dark Bronze (Protech #PC21462)
<b>GRAY</b>	Standard Gray (Protech #PC18367)	<b>GRN</b>	Green (RAL# 6005)
<b>SLV</b>	Satin Aluminum (RAL# 9006)	<b>WHT</b>	White (RAL# 9003)
<b>RAL#_____</b>	Specify Custom Color		

### ANCHOR BOLTS


Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" bend on one end and are galvanized a minimum of 12" on the threaded end. Template provided with every pole and anchor bolt order.

### ANCHOR BOLTS (Must specify)

<b>AB</b>	Anchor bolts (4 each, shipped with pole)
<b>LAB</b>	Less anchor bolts
<b>PAB</b>	Pre-shipped Anchor Bolts (4 each)

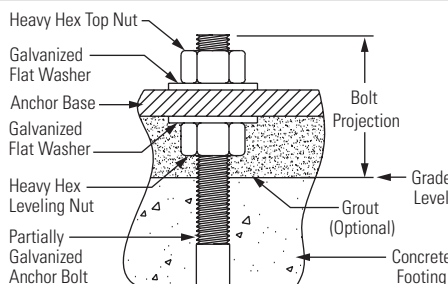

BOLT PROJECTION DETAIL

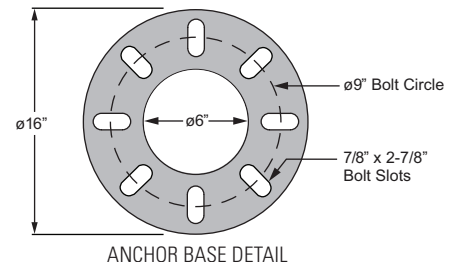

ANCHOR BASE DETAIL


STRUCTURAL BASE				ANCHOR BOLTS <sup>1</sup>		
BOLT CIRCLE		DIA.	THK.	BOLT SIZE	PROJECTION	±
(IN)	± (IN)	(IN)	(IN)	(IN)	(IN)	(IN)
9.00	N/A	16.00	0.86	0.75 x 17.00 x 3.00	3.50	N/A

<sup>1</sup> Provided with four anchor bolts. Base has eight slots for additional orientation.

**OPTIONS**

**FS** Festoon Box only

**NOTE: Casting only. Outlet, cover and hardware by others. The festoon box is located above the access door at 0°.**

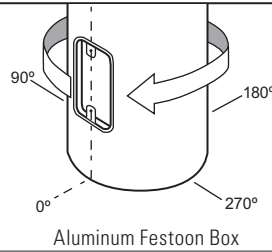

**ACCESSORIES**


**FINIALS** (For poles with side-mount drill only, for additional finial options consult factory)



**B** Ball



**H** South River



**M** Metro



**N** Pineapple



**P** Point



**R** Pantheon



**S** Spear



**V** Burnsville

**LOAD AND DIMENSIONAL DATA**

POLE HT. (FT)	CATALOG NUMBER	POLE DIMENSIONS				80 MPH <sup>2,3</sup>		90 MPH <sup>2,3</sup>		100 MPH <sup>2,3</sup>	
		BASE O.D. (IN)	TOP O.D. (IN)	WALL THK. (IN)	STRUC. WT. <sup>4</sup> (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)
8	AV10-A-080-40-188-S	4	4	.188	60	15.2	65	11.8	65	9.5	65
10	AV10-A-100-40-188-S	4	4	.188	65	12.4	65	9.6	65	7.6	65
12	AV10-A-120-40-188-S	4	4	.188	70	10.1	65	7.7	65	6.1	65
14	AV10-A-140-40-188-S	4	4	.188	76	8.3	65	6.2	65	4.8	65
14	AV10-A-140-40-250-S	4	4	.250	85	11.1	65	8.4	65	6.6	65
16	AV10-A-160-40-188-S	4	4	.188	81	6.6	65	4.8	65	3.6	65
16	AV10-A-160-40-250-S	4	4	.250	92	9.0	65	6.7	65	5.1	65

<sup>2</sup> Effective Projected Area (EPA) calculations allow for 1.3 Wind Gust Factor. Maximum EPA and weight values are based on top mounted luminaires or arm assembly having a centroid 3'-0" above and 3'-0" eccentric to the pole top at Nominal Mounting Height. Variations from sizes above are available upon inquiry. Satisfactory performance of poles is dependent upon the pole being properly attached to a supporting foundation of adequate design. See Williams Outdoor Information Section, page 6, for Load and Dimensional Data specifics.

<sup>3</sup> Wind map provided in Williams Outdoor information section, pole information page 6.

<sup>4</sup> Structure Weight is a nominal value which includes the pole shaft and structural base.

\* Pole installations in various parts of the country perform satisfactorily; however, in select locations destructive vibration can occur. H.E. Williams, Inc. is not responsible for vibration induced fatigue damage.

\* H.E. Williams, Inc. warrants this product to be free from defects in materials and workmanship. Any defective part returned within one year from the date of delivery of the goods will be repaired or replaced without charge, F.O.B. factory.

This warranty specifically excludes fatigue or similar phenomena resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the product.

The above warranties are given in lieu of all other warranties express or implied, including without limitation, the warranty of merchantability and the warranty of suitability for a particular purpose. It is expressly stated that H.E. Williams, Inc. assumes no liability for consequential or liquidated damages arising out of a breach of the sale, including any warranties arising therefrom, and buyer's remedy shall be limited to repair or replacement of defective parts as described above.

Any action for the breach under a sale including any warranties arising therefrom must be commenced within one year after the cause of action accrues.

**AV10**

**DECORATIVE NON-TAPERED ALUMINUM POLE AND BASE**

