

# HISTORIC LANTERN – CLASSIC WITH REFRACTOR

# HLDR15

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**

EXAMPLE: **HLDR15 - 150PSMH120 - DBR - OPTIONS**

SERIES

ELECTRICAL PACKAGE


FINISH OPTIONS

OPTIONS



## SERIES

**HLDR15** — Featuring a prismatic glass refractor for improved distribution, the HLDR15 is an attractive light source for parks, walkways, public spaces, and shopping areas. The fixture hood features classic styling and is hinged to provide easy on-site lamp and ballast access.

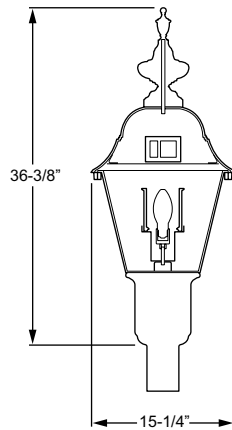

Total fixture EPA: 2.28/Weight: 40 Lbs.

## HLDR15 SERIES

**HOUSING** — Cast aluminum optical and ballast housing hinged for ease of relamping. Highly-reflective non-glare white painted reflector mounted in hood. Fully gasketed for weathertight performance.

**LENS** — U.V. stabilized 1/8" thick clear acrylic panel.

**REFRACTOR** — Prismatic glass refractor. Type V distribution.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
	50PSMH120	70PSMH120	100PSMH120	150PSMH120
	50PSMH208	70PSMH208	100PSMH208	150PSMH208
	50PSMH240	70PSMH240	100PSMH240	150PSMH240
	50PSMH277	70PSMH277	100PSMH277	150PSMH277
		70PSMH347	100PSMH347	150PSMH347
			100PSMH480	150PSMH480

### HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
	50HPS120	70HPS120	100HPS120	150HPS120
	50HPS208	70HPS208	100HPS208	150HPS208
	50HPS240	70HPS240	100HPS240	150HPS240
	50HPS277	70HPS277	100HPS277	150HPS277
		70HPS347	100HPS347	150HPS347
			100HPS480	150HPS480

## ELECTRICAL PACKAGE

**PSMH** — Rated -20°F minimum starting temperature.

**HPS** — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket. Integral ballast. Prewired at factory for easy field installation. HX-HPF or CWA ballast type standard. Easy access to lamp and ballast through hinged fixture hood. Lamp is optional, please specify when ordering.

# HLDR15

## HISTORIC LANTERN – CLASSIC WITH REFRACTOR

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### MOUNTING

Post top mounting on 3" O.D. tenon or pole. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

### LABELS

cCSAus certified as luminaire suitable for wet location.

### FINISH OPTIONS (Must specify)

<b>BLK</b>	Black (RAL# 9004)	<b>DBR</b>	Dark bronze (Protech #PC21462)
<b>GRAY</b>	Standard gray (Protech #PC18367)	<b>GRN</b>	Green (RAL# 6005)
<b>SLV</b>	Satin aluminum (RAL# 9006)	<b>WHT</b>	White (RAL# 9003)
<b>RAL#</b> _____	Specify custom color		

### OPTIONS

<b>SF</b>	Single fuse (120V, 277V, or 347V only; must specify voltage)
<b>DF</b>	Double fuse (208V, 240V, or 480V only; must specify voltage)

### PHOTOMETRIC DISTRIBUTION



Type V

