

HISTORIC LANTERN - CLASSIC WITH CHIMNEY

HLDC15

SUBMITTAL:

JOB:

TYPE:

VOLTAGE:

EXAMPLE:

HLDC15 - 100PSMH120 - DBR - OPTIONS

SERIES

ELECTRICAL PACKAGE


FINISH OPTIONS

OPTIONS



SERIES

HLDC15 — The classic hood styling and old-fashioned chimney detail of the HLDC15 adds an historic feel to a variety of outdoor applications. Sturdy cast aluminum construction, easy lamp and ballast access, and fully gasketed for wet location, these historic lanterns are attractive and practical.

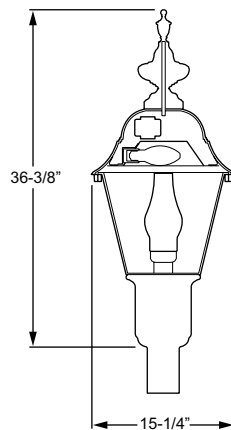

Total fixture EPA: 2.28/Weight: 40 Lbs.

HLDC15 SERIES

HOUSING — Cast aluminum optical and ballast housing hinged for ease of relamping. Highly-reflective non-glare white painted reflector mounted in hood. Fully gasketed for weathertight performance.

LENS — U.V. stabilized 1/8" thick clear acrylic panels.

DIFFUSER — Frosted glass chimney. Type V distribution.

ELECTRICAL PACKAGE (Must specify)

PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140
	50PSMH120	70PSMH120	100PSMH120
	50PSMH208	70PSMH208	100PSMH208
	50PSMH240	70PSMH240	100PSMH240
	50PSMH277	70PSMH277	100PSMH277
		70PSMH347	100PSMH347
			100PSMH480

HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54
	50HPS120	70HPS120	100HPS120
	50HPS208	70HPS208	100HPS208
	50HPS240	70HPS240	100HPS240
	50HPS277	70HPS277	100HPS277
		70HPS347	100HPS347
			100HPS480

ELECTRICAL PACKAGE

PSMH — Rated -20°F minimum starting temperature.

HPS — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket. Integral ballast. Prewired at factory for easy field installation. HX-HPF or CWA ballast type standard. Easy access to lamp and ballast through hinged fixture hood. Lamp is optional, please specify when ordering.

FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

MOUNTING

Post top mounting on 3" O.D. tenon or pole. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

LABELS

cCSAus certified as luminaire suitable for wet location.

FINISH OPTIONS (Must specify)

BLK	Black (RAL# 9004)	DBR	Dark bronze (Protech #PC21462)
GRAY	Standard gray (Protech #PC18367)	GRN	Green (RAL# 6005)
SLV	Satin aluminum (RAL# 9006)	WHT	White (RAL# 9003)
RAL# ____	Specify custom color		

OPTIONS

SF	Single fuse (120V, 277V, or 347V only; must specify voltage)
DF	Double fuse (208V, 240V, or 480V only; must specify voltage)

PHOTOMETRIC DISTRIBUTION



Type V