

# HISTORIC LANTERN - HERITAGE WITH OPAL LENS

# HHE016

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**

EXAMPLE:

**HHE016 - 150PSMH120 - OPAL - DBR - OPTIONS**


SERIES

ELECTRICAL PACKAGE

DOME

FINISH OPTIONS


OPTIONS



This fixture is proudly made in the USA.

## SERIES

**HHE016** — Williams Outdoor presents the Historic Heritage Lantern Series (HHE) designed with the character and features of an old-time gaslight. Carefully detailed features include the aerator top and hinged, but sealed access door that would have originally been used for lighting the flame.

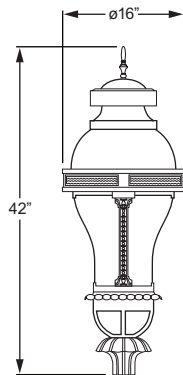

Total fixture EPA: 2.20/Weight: 35 Lbs.

## HHE016 SERIES

**HOUSING** — Cast aluminum housing frame and base with a spun aluminum top piece/aerator and brass plated finial. Gasketed for weathertight performance.

**LENS** — U.V. stabilized, one piece .188" thick opal acrylic. Type V distribution.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
	50PSMH120	70PSMH120	100PSMH120	150PSMH120
	50PSMH208	70PSMH208	100PSMH208	150PSMH208
	50PSMH240	70PSMH240	100PSMH240	150PSMH240
	50PSMH277	70PSMH277	100PSMH277	150PSMH277
		70PSMH347	100PSMH347	150PSMH347
			100PSMH480	150PSMH480

### HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
	50HPS120	70HPS120	100HPS120	150HPS120
	50HPS208	70HPS208	100HPS208	150HPS208
	50HPS240	70HPS240	100HPS240	150HPS240
	50HPS277	70HPS277	100HPS277	150HPS277
		70HPS347	100HPS347	150HPS347
			100HPS480	150HPS480

## ELECTRICAL PACKAGE

**PSMH** — Rated -20°F minimum starting temperature.

**HPS** — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket and integral ballast mounted on removable ballast tray. Prewired at factory to a disconnect plug for easy field installation. HX-HPF or CWA ballast type standard. Easy access to lamp through hinged top. Lamp is optional, please specify when ordering.



### DOME

Choice of .188" thick translucent opal acrylic or spun aluminum with powder coated finish.

### DOME (Must specify)

<b>OPAL</b>	Opal acrylic	<b>BLK</b>	Black (RAL# 9004)
<b>DBR</b>	Dark bronze (Protech #PC21462)	<b>GRAY</b>	Standard gray (Protech #PC18367)
<b>GRN</b>	Green (RAL# 6005)	<b>SLV</b>	Satin aluminum (RAL# 9006)
<b>WHT</b>	White (RAL# 9003)	<b>RAL#</b> _____	Specify custom color

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### FINISH OPTIONS (Must specify)

<b>BLK</b>	Black (RAL# 9004)	<b>DBR</b>	Dark bronze (Protech #PC21462)
<b>GRAY</b>	Standard gray (Protech #PC18367)	<b>GRN</b>	Green (RAL# 6005)
<b>SLV</b>	Satin aluminum (RAL# 9006)	<b>WHT</b>	White (RAL# 9003)
<b>RAL#</b> _____	Specify custom color		

### OPTIONS

<b>SF</b>	Single fuse (120V, 277V, or 347V only; must specify voltage)
<b>DF</b>	Double fuse (208V, 240V, or 480V only; must specify voltage)

### PHOTOMETRIC DISTRIBUTION



Type V

### MOUNTING

Post top mounting on 3" O.D. tenon or pole. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

### LABELS

cCSAus certified as luminaire suitable for wet location.