

HISTORIC LANTERN - HERITAGE WITH REFRACTOR


HHER16

SUBMITTAL:

JOB:

TYPE:

VOLTAGE:



EXAMPLE:

HHER16 - 150PSMH120 - OPAL - T5 - DBR - OPTIONS

SERIES

ELECTRICAL PACKAGE

DOME

PHOTO. DIST.

FINISH OPTIONS


OPTIONS



This fixture is proudly made in the USA.

SERIES

HHER16 — The prismatic glass refractor on the HHER16 provides effective Type III or Type V distribution. Ornate detailing on the cast aluminum housing frame and base is combined with a clear acrylic lens to reveal the refractor inside. This gaslight-style post top lamp is perfect for historic applications.

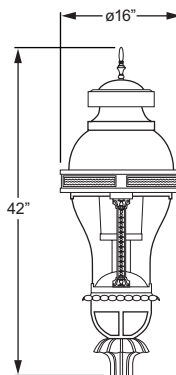

Total fixture EPA: 2.20/Weight: 39 Lbs.

HHER16 SERIES

HOUSING — Cast aluminum housing frame and base with a spun aluminum top piece/aerator and brass plated finial. Gasketed for weathertight performance.

LENS — U.V. stabilized, one piece .188" thick clear acrylic.

REFRACTOR — Prismatic glass refractor available in Type III or Type V distribution.

ELECTRICAL PACKAGE (Must specify)

PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
	50PSMH120	70PSMH120	100PSMH120	150PSMH120
	50PSMH208	70PSMH208	100PSMH208	150PSMH208
	50PSMH240	70PSMH240	100PSMH240	150PSMH240
	50PSMH277	70PSMH277	100PSMH277	150PSMH277
		70PSMH347	100PSMH347	150PSMH347
			100PSMH480	150PSMH480

HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
	50HPS120	70HPS120	100HPS120	150HPS120
	50HPS208	70HPS208	100HPS208	150HPS208
	50HPS240	70HPS240	100HPS240	150HPS240
	50HPS277	70HPS277	100HPS277	150HPS277
		70HPS347	100HPS347	150HPS347
			100HPS480	150HPS480

ELECTRICAL PACKAGE

PSMH — Rated -20°F minimum starting temperature.

HPS — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket and integral ballast mounted on removable ballast tray. Prewired at factory to a disconnect plug for easy field installation. HX-HPF or CWA ballast type standard. Easy access to lamp through hinged top. Lamp is optional, please specify when ordering.



DOME

Choice of .188" thick translucent opal acrylic or spun aluminum with powder coated finish.

DOME (Must specify)

OPAL	Opal acrylic	BLK	Black (RAL# 9004)
DBR	Dark bronze (Protech #PC21462)	GRAY	Standard gray (Protech #PC18367)
GRN	Green (RAL# 6005)	SLV	Satin aluminum (RAL# 9006)
WHT	White (RAL# 9003)	RAL# _____	Specify custom color

DISTRIBUTION

Prismatic glass refractor. Field adjustable with four set screws for Type III or Type V distribution.

PHOTOMETRIC DISTRIBUTION (Must specify)



T3
Type III



T5
Type V

FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

FINISH OPTIONS (Must specify)

BLK	Black (RAL# 9004)	DBR	Dark bronze (Protech #PC21462)
GRAY	Standard gray (Protech #PC18367)	GRN	Green (RAL# 6005)
SLV	Satin aluminum (RAL# 9006)	WHT	White (RAL# 9003)
RAL# _____	Specify custom color		

MOUNTING

Post top mounting on 3" O.D. tenon or pole. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

OPTIONS

SF	Single fuse (120V, 277V, or 347V only; must specify voltage)
DF	Double fuse (208V, 240V, or 480V only; must specify voltage)

LABELS

cCSAus certified as luminaire suitable for wet location.