

8" ROUND ALUMINUM BOLLARD

OSA8R

HID



SUBMITTAL:

JOB:

TYPE:

VOLTAGE:

EXAMPLE:

OSA8R - 100PSMH120 - AC - FT - DBR - AB - OPTIONS

SERIES

ELECTRICAL PACKAGE

SHIELD

HOUSING TOP







FINISH OPTIONS

ANCHOR BOLTS

OPTIONS

SERIES

This fixture is proudly made in the USA.

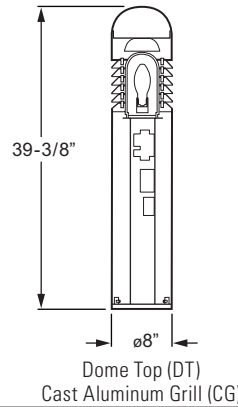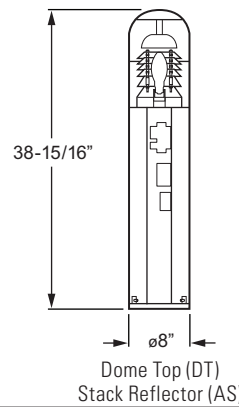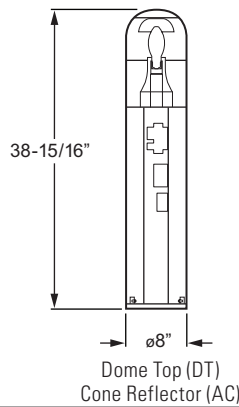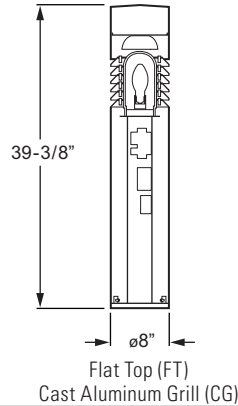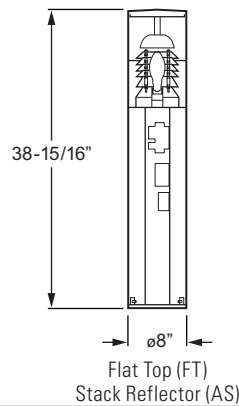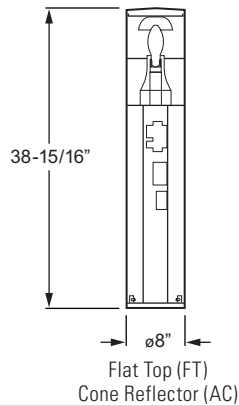

OSA8R SERIES

The versatile OSA8R Series round aluminum bollard offers a variety of shield-types and top designs for use in assorted low-light applications.
HOUSING — Fabricated aluminum housing, .125" wall thickness.

ELECTRICAL PACKAGE (Must specify)

PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	Medium	Medium	Medium
ANSI Ballast Code:	M148/M110	M143/M98	M90/M140
	50PSMH120	70PSMH120	100PSMH120
	50PSMH208	70PSMH208	100PSMH208
	50PSMH240	70PSMH240	100PSMH240
	50PSMH277	70PSMH277	100PSMH277
		70PSMH347	100PSMH347
			100PSMH480

ELECTRICAL PACKAGE

Porcelain socket.
Prewired at factory for easy field installation.
HX-HPF or CWA ballast type standard.
Rated -20°F minimum starting temperature.
Ballast mounted on removable tray for ease of maintenance.


HID

SHIELD


AC or AS (Acrylic) — U.V. stabilized clear acrylic cylinder machined to fit inside the luminaire housing and sealed with silicone. Spun aluminum cone or stack reflector with a specular Alzak finish.

CG (Louvered) — Cast aluminum grill is .188" thick with a clear glass vapor jar screwed into a cast shell and sealed with a closed-cell neoprene gasket.


SHIELD (Must specify)



AC Acrylic Lens with Cone Reflector



AS Acrylic Lens with Stack Reflector



CG Cast Aluminum Grill

HOUSING TOP (Must specify)

- DT** Dome Top
- FT** Flat Top

HOUSING TOP

Spun aluminum, .125" minimum wall thickness.

FINISH OPTIONS (Must specify)

- | | |
|--|---|
| BLK Black (RAL# 9004) | DBR Dark Bronze (Protech #PC21462) |
| GRAY Standard Gray (Protech #PC18367) | GRN Green (RAL# 6005) |
| SLV Satin Aluminum (RAL# 9006) | WHT White (RAL# 9003) |
| RAL# ____ Specify Custom Color | |

FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

ANCHOR BOLTS (Must specify)

- AB¹** Anchor Bolts (3 each, shipped with fixture)¹
- LAB** Less Anchor Bolts
- PAB¹** Pre-Shipped Anchor Bolts (3 each)¹

¹ Three 3/8" x 12" cast-in galvanized steel anchor J-bolts. Mounting template included.


OPTIONS

- SF** Single Fuse (120V, 277V, or 347V only; must specify voltage)
- DF** Double Fuse (208V, 240V, or 480V only; must specify voltage)

MOUNTING

3-Point cast aluminum base. For accurate installation a full-scale mounting template is provided with every bollard and anchor bolt order.


TEMPLATE



Mounting template (Provided with each order)

A pdf file (not to-scale) of the mounting template is available online at www.hewilliams.com.

DISTRIBUTION



T5 Type V

LABELS

cCSAus Certified as luminaire suitable for wet location.