

# 8" SQUARE ALUMINUM BOLLARD


# OSA8S

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**



**HID**

**EXAMPLE:** OSA8S - 100PSMH120 - AC - FT - DBR - AB - OPTIONS

SERIES

ELECTRICAL PACKAGE

SHIELD

HOUSING TOP







FINISH OPTIONS

ANCHOR BOLTS

OPTIONS

## SERIES

This fixture is proudly made in the USA.

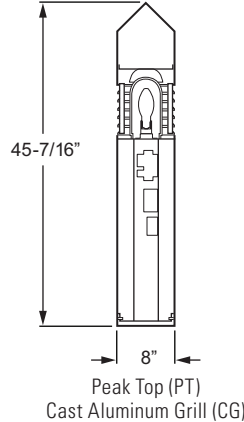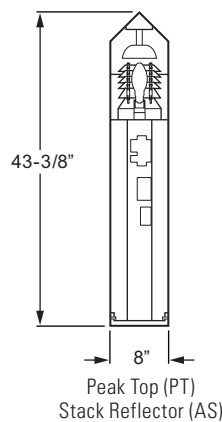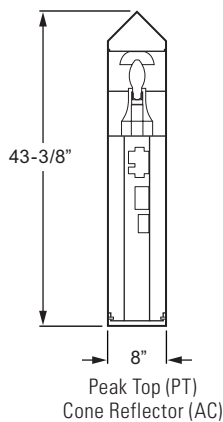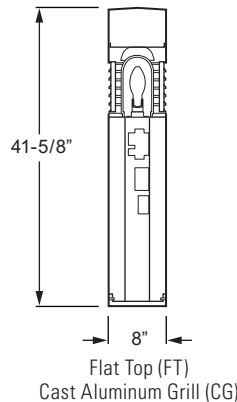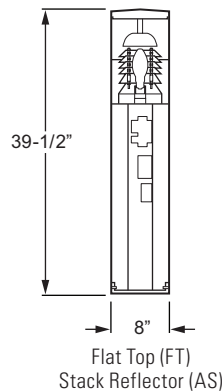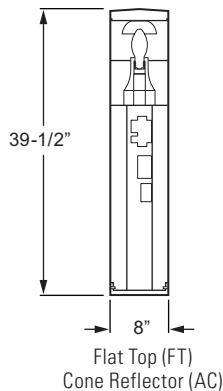

## OSA8S SERIES

The versatile OSA8S Series square aluminum bollard is made with quality construction and features several shielding and housing top options for numerous design possibilities.

**HOUSING** — Fabricated aluminum housing, .125" wall thickness.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	Medium	Medium	Medium
ANSI Ballast Code:	M148/M110	M143/M98	M90/M140
	50PSMH120	70PSMH120	100PSMH120
	50PSMH208	70PSMH208	100PSMH208
	50PSMH240	70PSMH240	100PSMH240
	50PSMH277	70PSMH277	100PSMH277
		70PSMH347	100PSMH347
			100PSMH480

## ELECTRICAL PACKAGE

Porcelain socket. Prewired at factory for easy field installation. HX-HPF or CWA ballast type standard. Rated -20°F minimum starting temperature. Ballast mounted on removable tray for ease of maintenance.

