

# SUSPENDED VINTAGE ACORN LUMINAIRE

# ODPD

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**

**EXAMPLE:** ODPD - 150PSMH120 - ACR - T5BL - DBR - OPTIONS

SERIES


ELECTRICAL PACKAGE

DIFFUSER

DISTRIBUTION

FINISH OPTIONS

OPTIONS




This fixture is proudly made in the USA.


## SERIES

### FEATURES

- ▶ Choice of clear, textured U.V. stabilized acrylic or impact-resistant polycarbonate diffuser.
- ▶ Fully gasketed for weathertight performance.
- ▶ Super durable powder coat finish is offered in six standard colors, custom colors available.
- ▶ Exclusive self-leveling twist-lock fitter for ease of installation.

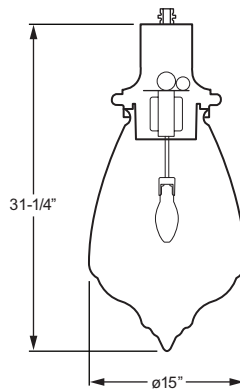

Shown with Bare Lamp (T5BL)  
Total fixture EPA: 1.22/Weight: 27 Lbs.

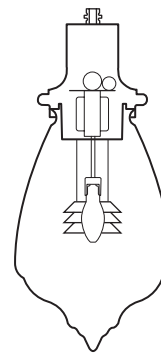

Shown with Stack Reflector (T5SR)

## ODPD SERIES HOUSING

Cast aluminum ballast housing with clear, textured U.V. stabilized acrylic or impact-resistant polycarbonate diffuser. Gasketed for weathertight performance.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
50PSMH120	70PSMH120	100PSMH120	150PSMH120	
50PSMH208	70PSMH208	100PSMH208	150PSMH208	
50PSMH240	70PSMH240	100PSMH240	150PSMH240	
50PSMH277	70PSMH277	100PSMH277	150PSMH277	
	70PSMH347	100PSMH347	150PSMH347	
		100PSMH480	150PSMH480	

### HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
50HPS120	70HPS120	100HPS120	150HPS120	
50HPS208	70HPS208	100HPS208	150HPS208	
50HPS240	70HPS240	100HPS240	150HPS240	
50HPS277	70HPS277	100HPS277	150HPS277	
	70HPS347	100HPS347	150HPS347	
		100HPS480	150HPS480	

## ELECTRICAL PACKAGE

**PSMH** — Rated -20°F minimum starting temperature.  
**HPS** — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket and integral ballast. Prewired at factory to a disconnect plug for easy field installation. HX-HPF or CWA ballast type standard. Lamp is optional, please specify when ordering.



### DIFFUSER

Molded U.V. stabilized acrylic or molded impact-resistant polycarbonate.

### DIFFUSER (Must specify)

- ACR** Acrylic diffuser
- CPC** Polycarbonate diffuser

### DISTRIBUTION

**BARE LAMP** — Type V distribution.  
**STACK REFLECTOR** — Spun aluminum stack reflector with a specular finish in Type V distribution.

### DISTRIBUTION (Must specify)



- T5BL** Type V bare lamp
- T5SR** Type V stack reflector

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### FINISH OPTIONS (Must specify)

- BLK** Black (RAL #9004)
- DBR** Dark bronze (Protech #PC21462)
- GRAY** Standard gray (Protech #PC18367)
- GRN** Green (RAL #6005)
- SLV** Satin aluminum (RAL #9006)
- WHT** White (RAL #9003)
- RAL#** \_\_\_\_\_ Specify custom color

### MOUNTING

Williams' exclusive self-leveling twist-lock fitter must be mounted to Williams' standard (TL2) twist-lock hub (see Williams' Decorative Pole Top Assemblies).



STANDARD TWIST-LOCK FITTER (Fits TL2 hub)

### OPTIONS

- SF** Single fuse (120V, 277V, or 347V only; must specify voltage)
- DF** Double fuse (208V, 240V, or 480V only; must specify voltage)

### LABELS

cCSAus certified as luminaire suitable for wet locations.

