

# VINTAGE PRISMATIC ACORN POST TOP

# OPC

**SUBMITTAL:**


**JOB:**

**TYPE:**

**VOLTAGE:**

EXAMPLE: **OPC - 150PSMH120 - ACR - T5 - 4TM - DBR - OPTIONS**


SERIES                      ELECTRICAL PACKAGE                      DIFFUSER                      DISTRIBUTION                      MOUNTING POINT                      FINISH OPTIONS                      OPTIONS

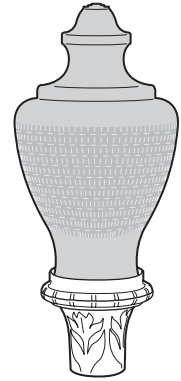

## SERIES

### FEATURES

- ▶ Choice of clear, textured U.V. stabilized acrylic or impact-resistant polycarbonate diffuser.
- ▶ Prismatic band provides optimal Type III or Type V distribution.
- ▶ Optional brass finial available.

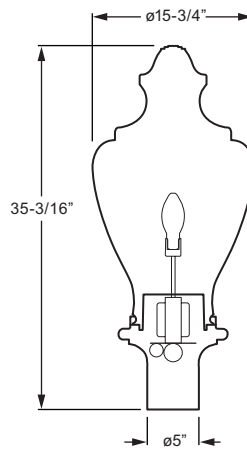

Total fixture EPA: 1.40/Weight: 28 Lbs.

### OPC SERIES HOUSING —

Cast aluminum base with clear, textured U.V. stabilized acrylic or impact-resistant polycarbonate diffuser. Gasketed for weathertight performance.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
	50PSMH120	70PSMH120	100PSMH120	150PSMH120
	50PSMH208	70PSMH208	100PSMH208	150PSMH208
	50PSMH240	70PSMH240	100PSMH240	150PSMH240
	50PSMH277	70PSMH277	100PSMH277	150PSMH277
		70PSMH347	100PSMH347	150PSMH347
			100PSMH480	150PSMH480

### HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
	50HPS120	70HPS120	100HPS120	150HPS120
	50HPS208	70HPS208	100HPS208	150HPS208
	50HPS240	70HPS240	100HPS240	150HPS240
	50HPS277	70HPS277	100HPS277	150HPS277
		70HPS347	100HPS347	150HPS347
			100HPS480	150HPS480

### ELECTRICAL PACKAGE

**PSMH** — Rated -20°F minimum starting temperature.

**HPS** — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket and integral ballast. Prewired at factory to a disconnect plug for easy field installation. HX-HPF or CWA ballast type standard. Lamp is optional, please specify when ordering.



### DIFFUSER

Molded U.V. stabilized acrylic or molded impact-resistant polycarbonate.

### DIFFUSER (Must specify)

- ACR** Acrylic diffuser
- CPC** Polycarbonate diffuser

### DISTRIBUTION

Integral prismatic band provides Type III or Type V distribution.

### DISTRIBUTION (Must specify)



**T3** Type III



**T5** Type V

### MOUNTING POINT

Post top mounting on 3" or 4" O.D. tenon or pole top. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

### MOUNTING POINT (Must specify)

- 3TM** 3" tenon mount
- 4TM** 4" tenon mount

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### FINISH OPTIONS (Must specify)

- BLK** Black (RAL #9004)
- DBR** Dark bronze (Protech #PC21462)
- GRAY** Standard gray (Protech #PC18367)
- GRN** Green (RAL #6005)
- SLV** Satin aluminum (RAL #9006)
- WHT** White (RAL #9003)
- RAL#** \_\_\_\_\_ Specify custom color

### OPTIONS

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li><b>SF</b> Single fuse (120V, 277V, or 347V only; must specify voltage)</li> </ul> | <ul style="list-style-type: none"> <li><b>DF</b> Double fuse (208V, 240V, or 480V only; must specify voltage)</li> </ul> |
|--|--|



- FIN** Solid brass finial

### LABELS

cCSAus certified as luminaire suitable for wet location.