

# SUSPENDED VINTAGE ACORN LUMINAIRE

# ODPR

## INDUCTION

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**

EXAMPLE:

**ODPR - 85QL120 - 40K - ACR - T5BL - DBR - OPTIONS**

SERIES

ELECTRICAL PACKAGE


COLOR TEMP.

DIFFUSER

DISTRIBUTION

FINISH OPTIONS

OPTIONS




This fixture is proudly made in the USA.

## SERIES

### FEATURES

- ▶ 100,000 hour lamp life significantly reduces maintenance where relamping is inconvenient or expensive.
- ▶ Induction lamps provide excellent lumen maintenance—70% at 60,000 hours.
- ▶ 80 color rendering index (CRI).
- ▶ -25°C/-13°F minimum operating ambient temperature, 40°C/104°F maximum operating ambient temperature.
- ▶ Choice of clear, textured, U.V. stabilized acrylic or impact-resistant polycarbonate diffuser.
- ▶ Fully gasketed for weathertight performance.
- ▶ Super durable powder coat finish is offered in six standard colors, custom colors available.
- ▶ Exclusive self-leveling twist-lock fitter for ease of installation.

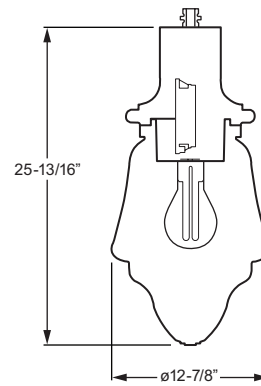

Total fixture EPA: .89/Weight: 25 Lbs.

## ODPR SERIES

### HOUSING —

Cast aluminum ballast housing with clear, textured, U.V. stabilized acrylic or impact-resistant polycarbonate diffuser. Gasketed for weathertight performance.

## ELECTRICAL PACKAGE (Must specify)

### QL INDUCTION SYSTEM

55QL120	85QL120
55QL208	85QL208
55QL240	85QL240
55QL277	85QL277

## ELECTRICAL PACKAGE

3-piece Philips QL induction system. Prewired at factory to a disconnect plug for easy field installation.

## LAMP COLOR TEMPERATURE (Must specify)

<b>27K</b>	2700K	<b>30K</b>	3000K	<b>40K</b>	4000K
------------	-------	------------	-------	------------	-------

## DIFFUSER (Must specify)

<b>ACR</b>	Acrylic diffuser	<b>CPC</b>	Polycarbonate diffuser
------------	------------------	------------	------------------------

## DIFFUSER

Molded U.V. stabilized acrylic or molded impact-resistant polycarbonate.

## DISTRIBUTION



**T5BL** Type V bare lamp

## DISTRIBUTION

Type V distribution.



## INDUCTION

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### MOUNTING

Williams' exclusive self-leveling twist-lock fitter must be mounted to Williams' standard (TL2) twist-lock hub (see Williams' Decorative Pole Top Assemblies).



STANDARD  
TWIST-LOCK FITTER  
(Fits TL2 hub)

### LABELS

cCSAus certified as luminaire suitable for wet locations.

### FINISH OPTIONS (Must specify)

<b>BLK</b>	Black (RAL #9004)
<b>DBR</b>	Dark bronze (Protech #PC21462)
<b>GRAY</b>	Standard gray (Protech #PC18367)
<b>GRN</b>	Green (RAL #6005)
<b>SLV</b>	Satin aluminum (RAL #9006)
<b>WHT</b>	White (RAL #9003)
<b>RAL#_____</b>	Specify custom color

### OPTIONS

<b>SF</b>	Single fuse (120V or 277V only; must specify voltage)
<b>DF</b>	Double fuse (208V or 240V only; must specify voltage)