


OGC INSTALLATION INSTRUCTIONS

**** Installation of these products should only be performed by a qualified electrician. ****

1. Carefully unpack cage, globe, and mounting hardware from carton taking precaution not to scratch the finish during the installation process.
2. Slide the cage slipfitter over the pole.
3. Insert the (8) 3/8-16 socket head set screws as illustrated. Use set screws to level the cage. Once level, tighten set screws.
4. Being sure that all electrical power is turned off, plug the prewired female service connector at the base of the fixture (see Fig. A) into the male service connector at pole.
5. Attach fixture to cage by sliding the fixture's integral slipfitter over cage tenon.

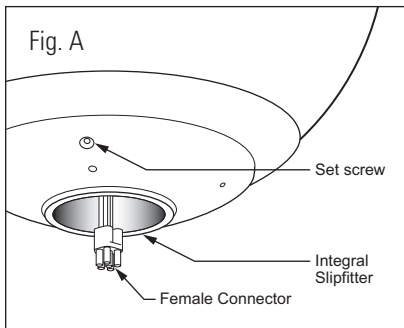

6. Insert the (4) 3/8-16 socket head set screws as illustrated. Use the set screws to level the fixture. Once level, tighten set screws.
7. Install lamp and/or refractor/reflector.
8. Install globe by lowering over fixture until it rests on fixture base. Turn globe to engage screw thread and tighten. Tighten set screw (Fig. A) from underneath when done.
9. Connect power and ground connections to the fixture using UL approved connectors at the pole, per applicable local codes.

Note: Refer to individual product specification sheet for fixture details.

