


# INFORMATION

## DFK DRYWALL FLANGE KIT

The Drywall Flange Kit is easily assembled and installed


### 1. ASSEMBLE CORNER ANGLES

Insert galvanized corner angles into side and end rails (for individual fixtures) or into side rail and intermediate rail (for continuous row mounting).




### 2. CEILING MOUNTING

Place the assembled frame into the ceiling opening and wire support (as shown below) from rigid ceiling structure.

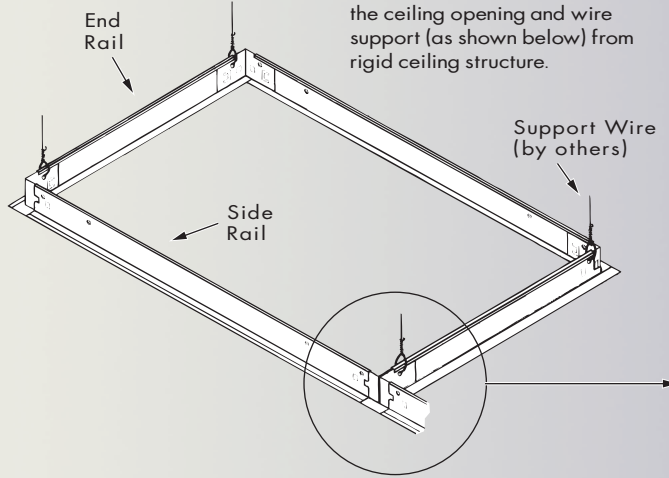

### CONTINUOUS ROW MOUNTING

For continuous row installation, order one individual unit (DFK) and the balance in extension sections (DFKR). Use one end rail from the individual unit at the ends of the row.

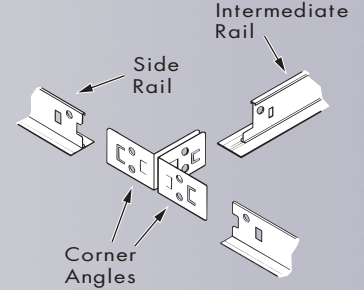


## ORDERING INFORMATION

CATALOG NUMBER	NOMINAL SIZE	WIDTH			LENGTH			TYPE OF MOUNTING
		A	B	C	D	E	F	
DFK-0424W	4" x 2'	4 5/8"	5 5/16"	3 3/16"	24 3/8"	25 5/16"	23 3/16"	Individual
DFK-0448W	4" x 4'	4 5/8"	5 5/16"	3 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-0848W	8" x 4'	8 3/8"	9 5/16"	7 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-1024W	10" x 2'	10 3/8"	11 5/16"	9 3/16"	24 3/8"	25 5/16"	23 3/16"	Individual
DFK-1048W	10" x 4'	10 3/8"	11 5/16"	9 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-1212W	1' x 1'	12 3/8"	13 5/16"	11 3/16"	12 3/8"	13 5/16"	11 3/16"	Individual
DFK-1224W	1' x 2'	12 3/8"	13 5/16"	11 3/16"	24 3/8"	25 5/16"	23 3/16"	Individual
DFK-1236W	1' x 3'	12 3/8"	13 5/16"	11 3/16"	36 3/8"	37 5/16"	35 3/16"	Individual
DFK-1248W	1' x 4'	12 3/8"	13 5/16"	11 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-2048W	20" x 4'	20 3/8"	21 5/16"	19 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-2424W	2' x 2'	24 3/8"	25 5/16"	23 3/16"	24 3/8"	25 5/16"	23 3/16"	Individual
DFK-2448W	2' x 4'	24 3/8"	25 5/16"	23 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFK-3636W	3' x 3'	36 3/8"	37 5/16"	35 3/16"	36 3/8"	37 5/16"	35 3/16"	Individual
DFK-4848W	4' x 4'	48 3/8"	49 5/16"	47 3/16"	48 3/8"	49 5/16"	47 3/16"	Individual
DFKR-1048W	10" x 4'	10 3/8"	11 5/16"	9 3/16"	<b>NOTE:</b> For each 4' fixture in continuous row, add 48" to above			Continuous Row (Extension Sections)
DFKR-1248W	1' x 4'	12 3/8"	13 5/16"	11 3/16"				
DFKR-2448W	2' x 4'	24 3/8"	25 5/16"	23 3/16"				
DFKR-0848W	8" x 4'	24 3/8"	9 5/16"	7 3/16"				

For continuous row installation, order one individual unit and balance in extension DFKR sections

## TYPICAL INSTALLATION

Refer to the table above for dimensions

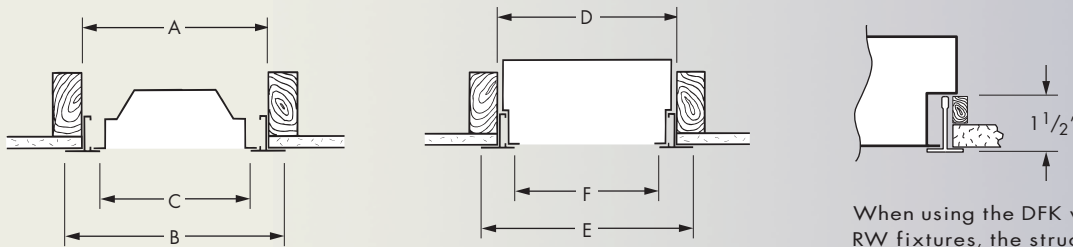

When using the DFK with Williams DI, DSP, and RW fixtures, the structure surrounding the DFK is to extend no more than 1 1/2" from the bottom of the "T", as shown.