

# HISTORIC LANTERN - CLASSIC WITH OPAL LENS

# HLD015

**SUBMITTAL:**

**JOB:**

**TYPE:**

**VOLTAGE:**



**EXAMPLE:** **HLD015** - **150PSMH120** - **DBR** - **OPTIONS**


▼
▼
▼
▼

SERIES
ELECTRICAL PACKAGE
FINISH OPTIONS
OPTIONS



## SERIES

**HLD015** — The translucent opal acrylic lens provides even distribution in a historic lantern-style housing. Fully gasketed for wet location and designed for easy lamp and ballast access, the HLD015 is a sensible solution for traditional post-top applications.

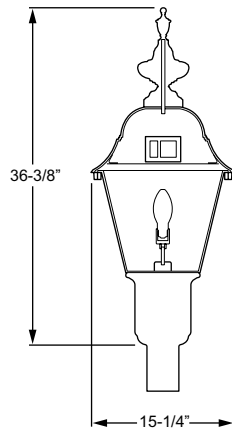

Total fixture EPA: 2.28/Weight: 40 Lbs.

## HLD015 SERIES

**HOUSING** — Cast aluminum optical and ballast housing hinged for ease of relamping. Highly-reflective non-glare white painted reflector mounted in hood. Fully gasketed for weathertight performance.

**LENS** — U.V. stabilized 1/8" thick opal acrylic panels. Type V distribution.

## ELECTRICAL PACKAGE (Must specify)

### PULSE START METAL HALIDE

Lamp:	ED-17/E17	ED-17/E17	ED-17/E17	ED-17/E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	M110/M148	M98/M143	M90/M140	M102/M142
	50PSMH120	70PSMH120	100PSMH120	150PSMH120
	50PSMH208	70PSMH208	100PSMH208	150PSMH208
	50PSMH240	70PSMH240	100PSMH240	150PSMH240
	50PSMH277	70PSMH277	100PSMH277	150PSMH277
		70PSMH347	100PSMH347	150PSMH347
			100PSMH480	150PSMH480

### HIGH PRESSURE SODIUM

Lamp:	E17	E17	E17	E17
Socket:	E26 Medium	E26 Medium	E26 Medium	E26 Medium
ANSI Ballast Code:	S68	S62	S54	S55
	50HPS120	70HPS120	100HPS120	150HPS120
	50HPS208	70HPS208	100HPS208	150HPS208
	50HPS240	70HPS240	100HPS240	150HPS240
	50HPS277	70HPS277	100HPS277	150HPS277
		70HPS347	100HPS347	150HPS347
			100HPS480	150HPS480

## ELECTRICAL PACKAGE

**PSMH** — Rated -20°F minimum starting temperature.

**HPS** — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket. Integral ballast. Prewired at factory for easy field installation. HX-HPF or CWA ballast type standard. Easy access to lamp and ballast through hinged fixture hood. Lamp is optional, please specify when ordering.

### FINISH OPTIONS

Super durable polyester powder coat meets and exceeds AAMA 2604 specifications for outdoor durability.

### MOUNTING

Post top mounting on 3" O.D. tenon or pole. Secured with stainless steel set screws. See Williams' Poles or Pole Top Assemblies for details.

### LABELS

cCSAus certified as luminaire suitable for wet location.

### FINISH OPTIONS (Must specify)

<b>BLK</b>	Black (RAL# 9004)	<b>DBR</b>	Dark bronze (Protech #PC21462)
<b>GRAY</b>	Standard gray (Protech #PC18367)	<b>GRN</b>	Green (RAL# 6005)
<b>SLV</b>	Satin aluminum (RAL# 9006)	<b>WHT</b>	White (RAL# 9003)
<b>RAL#</b> ____	Specify custom color		

### OPTIONS

<b>SF</b>	Single fuse (120V, 277V, or 347V only; must specify voltage)
<b>DF</b>	Double fuse (208V, 240V, or 480V only; must specify voltage)

### PHOTOMETRIC DISTRIBUTION



Type V